



Virtual Wall

LED All-in-one Display Terminal

Ultra-wide LED Wall



PRODUCT FEATURES



Integrated Design Stable and Reliable Performance

Free from peripheral devices including LED controller and video processor, as well as complex wiring and commissioning.

No Extra Devices

Built-in Intelligent System

3-in-1 Design



Ultra-wide Vision Perfect Viewing Experience

Wide screen offers unlimited viewing experience with 32:9 aspect ratio, and ensures high definition and stunning effect when playing static image and high-speed dynamic image.

High Gray Scale Level under Low Brightness

3840*1080 Resolution



Various Modes for Different Application Scenarios

Support different screen split mode according to application scenarios, and real-time wireless mirroring share via PC, mobile phone and tablet.

Wireless Mirroring

Remote Control

Built-in Video Processor




Inherit Light-weight Cabinet Design Shake off Space limitations

The cabinet adopts magnalium design with high precision and outstanding heat dissipation. Fully front-access installation and maintenance save spaces for onsite

31mm Overall Thickness

7mm Ultra-slim Frame

Fully Front Access

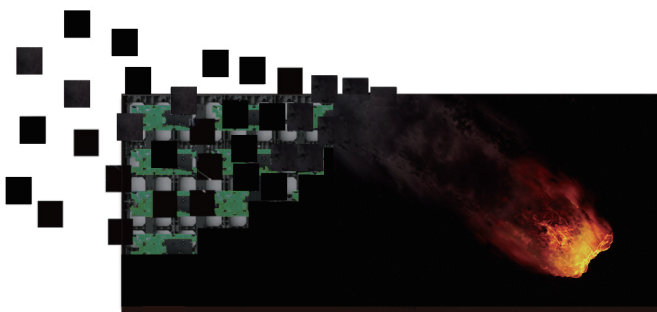

SPECIFICATIONS

Model	LM199C25	LM249C25	LM299C25
Display Diagonal (inches)	199"	249"	299"
Overall Dimension(W × H×D)(mm)	4894 × 1489 × 31	6114 × 1832 × 31	7334 × 2175 × 31
Weight (kg)	175	265	375
Resolution	3840 × 1080		
Brightness (nits)	100–550cd/ m ²		
Refresh Rate (Hz)	3840		
Contrast	6500:1		
Cabinet Material	H27 Series Magnalium		
Viewing Angle (H/V)	160° /140°		
Installation Mode	Wall Mounting / Hanging		
Maintenance	Front access		
Power Consumption(Max./Ave.)(KW)	2.90/0.99	4.38/1.49	5.66/2.26
Recommended Viewing Distance(m)	≥2.5	≥3.2	≥3.8

31mm from overall dimension refers to thickness of screen.

Note: Specifications are for reference only and are subject to change without notice.

